

## RC5635OLPSW5 – 3/8 in. x 35 ft. Pre-Rinse Hose Reel




Series 5000 pre-rinse hose reels are durable and compact for a wide range of applications with critical space requirements.

- Hose is plumbed into the base to eliminate the risk of undue stress on the swivel
- Low-pressure 3/8 in. x 35 ft. rubber hose included; rated for hot water up to 180 °F(82°C)
- A lever-operated spray valve is included
- Optional 360° rotating swivel (600248) offers 20° of angular motion
- Push-Lok®, field replaceable, hose end fittings
- Base plate and upright are constructed from 14 gauge steel; the guide arm is 13 gauge and the spool is 16 gauge steel
- The reliable speed latch allows for positive locking of the spool in two positions per rotation
- Individually powder-coated steel components provide maximum protection from premature corrosion
- Robotically welded steel base offers maximum strength and consistent quality
- Guide arm adjusts to two positions
- Made in the USA

\*Reel is shipped in the top wind position. The reel image is shown in the side wind position.

Weight	27 lbs
Series	5000
Hose I.D.	3/8"
Hose O.D.	0.640"
Hose Length	35'
Pressure	125 psi
Hose End	3/8" NPT(M)
Inlet	3/8" NPT(F)
Reel Outlet	1/4" NPT(F)
Hose Included	Yes
Max Temperature	180 °F
UPC	699567002697
Carton Dimensions	14.375" x 6" x 15.25"

A	14.375"
B	14.25"
C	9.75"
D	2.5"
E	6.125"

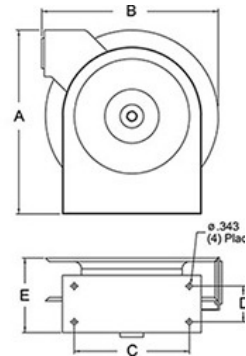

Internal Fluid Path	Steel
Swivel Assembly	Copper
Swivel Seal	Buna



SG-38  
spray gun  
assembly



#RC600626  
wall-mounted  
swing bracket  
(allows hose reel  
to pivot approx.  
180°).



#RCS6010242  
Inlet hose, 3/8 X  
2FT



RCS601021-35  
1/2 in. x 35 ft.  
Water Hose

## RCA5835OLP – 1/2 in. x 35 ft. Premium Duty Hose Reel




Series 5005 hose reels are durable and compact for a wide range of applications with critical space requirements.

- Hose is plumbed into the base to eliminate the risk of undue stress on the swivel
- The bent tube swivel design offers a smooth hose transition onto the spool
- The swivel is nested inside the spool for protection from impact and the environment
- Low-pressure 1/2 in. x 35 ft. PVC hose included; hose is for air or water service only
- Base plate and upright are constructed from 14 gauge steel; the guide arm is 13 gauge and the spool is 16 gauge steel
- The reliable speed latch allows for positive locking of the spool in two positions per rotation
- Individually powder-coated steel components provide maximum protection from premature corrosion
- Robotically welded steel base offers maximum strength and consistent quality
- Guide arm adjusts to two positions
- Made in the USA

\*Reel is shipped in the top wind position. The reel image is shown in the side wind position.

Weight	39 lbs
Series	5005
Hose I.D.	1/2"
Hose O.D.	0.75"
Hose Length	35'
Pressure	300 psi
Hose End	3/8" NPT(M)
Inlet	3/8" NPT(F)
Reel Outlet	1/2" NPT(F)
Hose Included	Yes
Max Temperature	150 °F
UPC	699567000174
Carton Dimensions	17" x 6.25" x 19"

A	17.625"
B	16.75"
C	9.75"
D	2.5"
E	5.875"

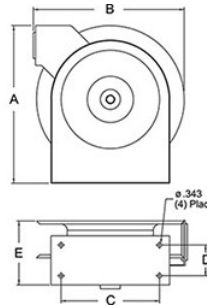

Internal Fluid Path	Steel
Swivel Assembly	Steel
Swivel Seal	Buna



RCS60102135  
1/2 in. x 35 ft.  
Water Hose



SV-38  
spray valve  
assembly



SG-38  
spray gun  
assembly



#RC600626  
wall-mounted  
swing bracket  
(allows hose reel  
to pivot approx.  
180°).



#RCS6010242  
Inlet hose, 3/8 X  
2FT

## RC7850OLP – 1/2 in. x 50 ft. Premium Duty Hose Reel




The Series 7000 spring retractable hose reel is very robust and ideal for the most demanding applications.

- The base and guide arm are constructed from high-grade steel and engineered with structural forms and gussets to yield the greatest amount of strength.
- Individually powder-coated steel components provide maximum protection from premature corrosion
- Inlet hose is plumbed into the base to eliminate the risk of stress on the swivel
- Low-pressure 1/2 in. x 50 ft. PVC hose included; hose is for air or water service only
- Guide arm adjusts to seven positions
- Base plate, upright, and guide arm are constructed from 11 gauge steel; the spool is 16 gauge steel
- Made in the USA

\*Reel is shipped in the top wind position. The reel image is shown in the side wind position

Weight	47 lbs
Series	7000
Hose I.D.	1/2"
Hose O.D.	0.75"
Hose Length	50'
Pressure	300 psi
Hose End	3/8" NPT(M)
Inlet	1/2" NPT(F)
Reel Outlet	1/2" NPT(F)
Hose Included	Yes
Max Temperature	150 °F
UPC	699567000228
Carton Dimensions	23.375" x 9.375" x 25.5"

A	20.25"
B	19.75"
C	7.8125"
D	3.875"
E	7"

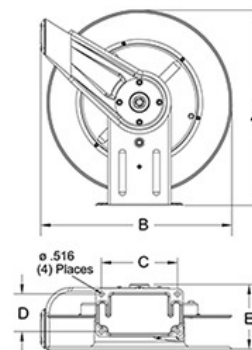

Internal Fluid Path	Steel
Swivel Assembly	Steel
Swivel Seal	Buna



RCS601021-50  
1/2 in. x 50 ft.  
Water Hose

SV-38  
spray valve  
assembly

SG-38  
spray gun  
assembly

#RC600626  
wall-mounted  
swing bracket  
(allows hose reel  
to pivot approx.  
180°).

#RCS6010202  
Inlet hose, 1/2 X  
2FT

## RC7800LS – 1/2 in. x 50 ft. Stainless Steel Hose Reel




Stainless steel hose reels are ideal for food processing, pre-rinse, wash down, chemical transfer, and industrial-solvent handling. Stainless steel reels are suitable for coastal, offshore, and on-board ships in marine applications where the harsh environment requires the use of stainless steel.

- Reinforced steel – The stainless steel guide arm and base are stamped with ribs and gussets to ensure maximum strength and lightest possible weight.
- Inlet hose is plumbed into the base to eliminate the risk of stress on the swivel
- Guide arm adjusts to seven positions
- Quality finish and corrosion resistant – Stainless steel components offer the maximum protection from premature corrosion.
- Constructed from electropolished 304L stainless steel
- Swivel includes FKM O-rings
- Note: Standard latch parts are made from aluminum. Stainless latch parts are available as a special order.
- Made in the USA

\*Reel is shipped in the top wind position. The reel image is shown in the side wind position.

Weight	41 lbs
Series	7000
Hose I.D.	1/2"
Hose O.D.	0.75"
Hose Length	50'
Pressure	500 psi
Inlet	1/2" NPT(F)
Reel Outlet	1/2" NPT(F)
Hose Included	No
Max Temperature	210 °F
UPC	699567002550
Carton Dimensions	23.375" x 9.375" x 25.5"

A	20.25"
B	19.75"
C	7.8125"
D	3.875"
E	7"

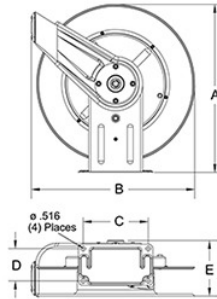

Internal Fluid Path	Stainless Steel
Swivel Assembly	Stainless Steel
Swivel Seal	FKM



RCS601021-50  
1/2 in. x 50 ft.  
Water Hose

RC2HS10043  
Adjustable  
Bumper Stop

SV-38  
spray valve  
assembly

SG-38  
spray gun  
assembly

#RC600626  
wall-mounted  
swing bracket  
(allows hose reel  
to pivot approx.  
180°).

#RCS6010202  
Inlet hose, 1/2 X  
2FT

## RCRT625OLP – 3/8 in. x 25 ft. Medium Duty Hose Reel




The RT-series is an economical choice for a medium duty, lighter-weight, spring retractable hose reel for applications that are less demanding, yet require a product that can withstand industrial and commercial use.

- Spool is constructed from a rugged engineered plastic
- Individually powder coated steel components offer maximum protection from premature corrosion
- The steel guide arm and base are stamped with ribs and gussets to ensure maximum strength and lightest possible weight
- Widened ratchet and latch pawl design greatly reduces wear and increases service life
- Low-pressure 3/8 in. x 25 ft. PVC hose included; hose is for air or water service only
- The industrial-grade drive spring completely containerized and permanently sealed
- Inlet hose is plumbed into the base to eliminate the risk of undue stress on the swivel
- Guide arm adjusts to seven positions
- Made in the USA

\*Reel is shipped in the top wind position. The reel image is shown in the side wind position.

Weight	20 lbs
Series	RT
Hose I.D.	3/8"
Hose O.D.	0.600"
Hose Length	25'
Pressure	300 psi
Hose End	1/4" NPT(M)
Inlet	1/2" NPT(F)
Reel Outlet	1/4" NPT(F)
Hose Included	Yes
Max Temperature	150 °F
UPC	699567000471
Carton Dimensions	17" x 6.25" x 19"

A	17.875"
B	16.5"
C	6"
D	2.25"
E	6.25"

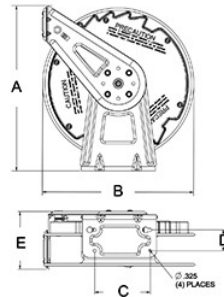

Internal Fluid Path	Steel
Swivel Assembly	Copper
Swivel Seal	Buna



RCS60101325  
3/8 in. x 25 ft  
Water Hose



SV-14  
spray valve  
assembly



SG-14  
spray gun  
assembly



#RC600626  
wall-mounted  
swing bracket  
(allows hose reel  
to pivot approx.  
180°).



#RCS6010202  
Inlet hose, 1/2 X  
2FT

## RCRT635OLP – 3/8 in. x 35 ft. Medium Duty Hose Reel




The RT-series is an economical choice for a medium duty, lighter-weight, spring retractable hose reel for applications that are less demanding, yet require a product that can withstand industrial and commercial use.

- Spool is constructed from a rugged engineered plastic
- Individually powder coated steel components offer maximum protection from premature corrosion
- The steel guide arm and base are stamped with ribs and gussets to ensure maximum strength and lightest possible weight
- Widened ratchet and latch pawl design greatly reduces wear and increases service life
- Low-pressure 3/8 in. x 35 ft. PVC hose included; hose is for air or water service only
- The industrial-grade drive spring completely containerized and permanently sealed
- Inlet hose is plumbed into the base to eliminate the risk of undue stress on the swivel
- Guide arm adjusts to seven positions
- Made in the USA

\*Reel is shipped in the top wind position. The reel image is shown in the side wind position.

Weight	21 lbs
Series	RT
Hose I.D.	3/8"
Hose O.D.	0.600"
Hose Length	35'
Pressure	300 psi
Hose End	1/4" NPT(M)
Inlet	1/2" NPT(F)
Reel Outlet	1/4" NPT(F)
Hose Included	Yes
Max Temperature	150 °F
UPC	699567000068
Carton Dimensions	17" x 6.25" x 19"

A	17.875"
B	16.5"
C	6"
D	2.25"
E	6.25"

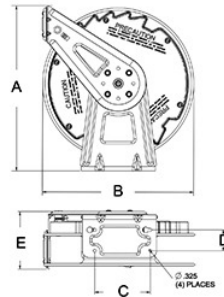

Internal Fluid Path	Steel
Swivel Assembly	Copper
Swivel Seal	Buna



RCS601013-35  
3/8 in. x 35 ft.  
Water Hose



SV-14  
spray valve  
assembly



SG-14  
spray gun  
assembly



#RC600626  
wall-mounted  
swing bracket  
(allows hose reel  
to pivot approx.  
180°).



#RCS6010202  
Inlet hose, 1/2 X  
2FT

## RCRT650OLP – 3/8 in. x 50 ft. Medium Duty Hose Reel




The RT-series is an economical choice for a medium duty, lighter-weight, spring retractable hose reel for applications that are less demanding, yet require a product that can withstand industrial and commercial use.

- Spool is constructed from a rugged engineered plastic
- Individually powder coated steel components offer maximum protection from premature corrosion
- The steel guide arm and base are stamped with ribs and gussets to ensure maximum strength and lightest possible weight
- Widened ratchet and latch pawl design greatly reduces wear and increases service life
- Low-pressure 3/8 in. x 50 ft. PVC hose included; hose is for air or water service only
- The industrial-grade drive spring completely containerized and permanently sealed
- Inlet hose is plumbed into the base to eliminate the risk of undue stress on the swivel
- Guide arm adjusts to seven positions
- Made in the USA

\*Reel is shipped in the top wind position. The reel image is shown in the side wind position.

Weight	27 lbs
Series	RT
Hose I.D.	3/8"
Hose O.D.	0.600"
Hose Length	50'
Pressure	300 psi
Hose End	1/4" NPT(M)
Inlet	1/2" NPT(F)
Reel Outlet	1/4" NPT(F)
Hose Included	Yes
Max Temperature	150 °F
UPC	699567000051
Carton Dimensions	17" x 6.25" x 19"

A	17.875"
B	16.5"
C	6"
D	2.25"
E	6.25"

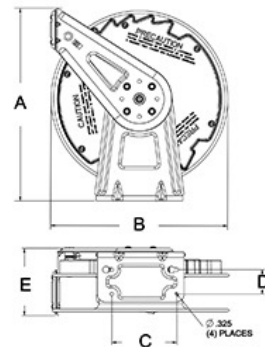

Internal Fluid Path	Steel
Swivel Assembly	Copper
Swivel Seal	Buna



RCS601013-50  
3/8 in. x 50 ft.  
Water Hose

SV-14  
spray valve  
assembly

SG-14  
spray gun  
assembly

#RC600626  
wall-mounted  
swing bracket  
(allows hose reel  
to pivot approx.  
180°).

#RCS6010202  
Inlet hose , 1/2 X  
2FT

## RC4420OLP – 1/4 in. x 20 ft. Ultra-Compact Hose Reel




Series 4000 reels are durable and compact for a wide range of applications with critical space requirements.

- Hose is plumbed into the base to eliminate the risk of undue stress on the swivel
- The bent tube swivel design offers a smooth hose transition onto the spool
- Swivel is nested inside the spool for protection from impact and the environment
- Low-pressure 1/4 in. x 20 ft. PVC hose included; hose is for air or water service only
- Base plate and upright are constructed from 14 gauge steel; the guide arm is 13 gauge and the spool is 16 gauge steel
- The reliable speed latch allows for positive locking of the spool in two positions per rotation
- Individually powder-coated steel components provide maximum protection from premature corrosion
- Robotically welded steel base offers maximum strength and consistent quality
- Made in the USA

\*Reel is shipped in the top wind position. The reel image is shown in the side wind position.

Weight	20 lbs
Series	4000
Hose I.D.	1/4"
Hose O.D.	0.475"
Hose Length	20'
Pressure	300 psi
Hose End	1/4" NPT(M)
Inlet	3/8" NPT(F)
Reel Outlet	1/4" NPT(F)
Hose Included	Yes
Max Temperature	150 °F
UPC	699567000112
Carton Dimensions	13" x 5.375" x 13.5"

A	12.875"
B	12.625"
C	8"
D	2.5"
E	5.625"

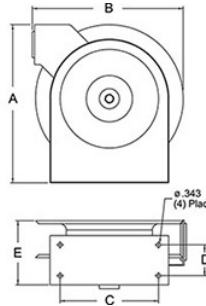

Internal Fluid Path	Steel
Swivel Assembly	Copper
Swivel Seal	Buna



RCS601001-20  
1/4 in. x 20 ft.  
Water Hose



SV-14  
spray valve  
assembly



SG-14  
spray gun  
assembly



#RC600626  
wall-mounted  
swing bracket  
(allows hose reel  
to pivot approx.  
180°).



#RCS6010242  
Inlet hose, 3/8 X  
2FT